




IFCF

International Firefighter Cancer Foundation

www.FFCancer.org

Firefighter Contamination Reduction Matrix

THE HOT ZONE

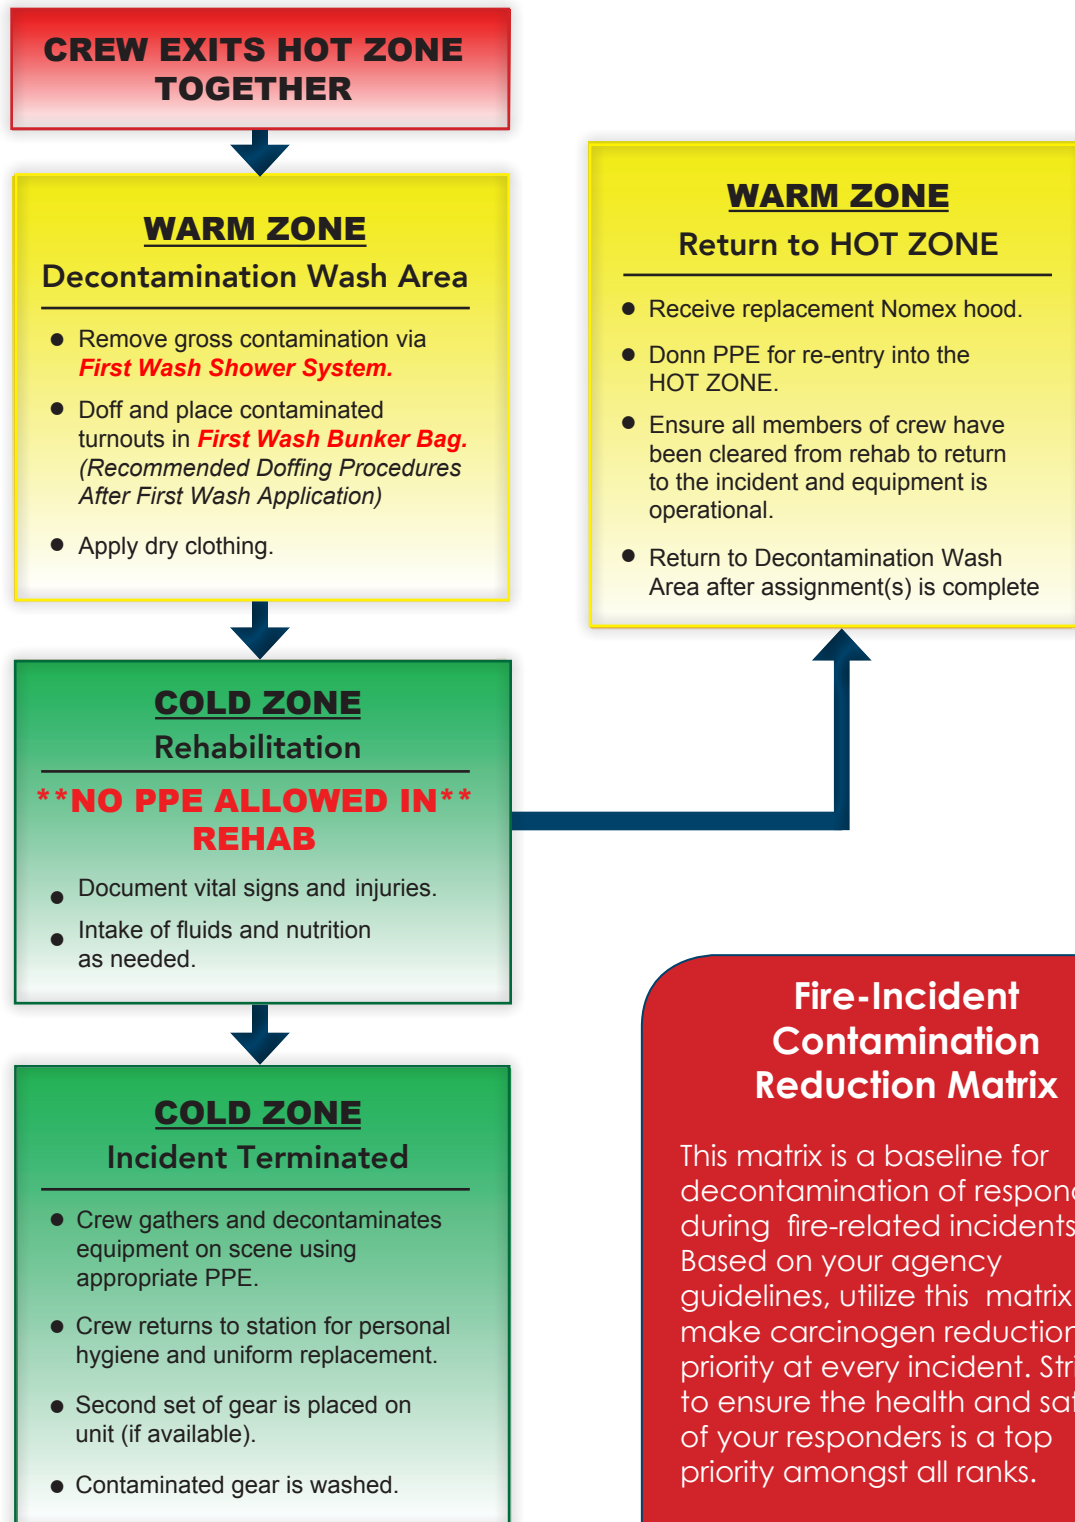



IFCF

International Firefighter Cancer Foundation

www.FFCancer.org

THE HOT ZONE

RECOMMENDED DOFFING PROCEDURES AFTER FIRST WASH APPLICATION

Upper Segment

1. Remove Structural Gloves and use latex gloves for the remainder of the doffing process.
2. Remove Helmet
3. Remove Hood (maintaining mask and regulator operation) slide protective hood over SCBA Mask and allow the hood to remain on the regulator hose.
4. Remove SCBA (with mask and regulator still in operation).
5. Remove Coat

Place Gear Contents into First Wash® Bunker Bag and store appropriately.



Lower Segment

6. Remove Pants and Boots
- Place Gear Contents into First Wash® Bunker Bag and store appropriately.***
7. Remove Mask and Regulator and place into First Wash® Mask Bag.
 8. Remove protective hood from SCBA regulator hose.
 9. Remove latex gloves and use recommended wipes to remove surface skin areas, then dispose into appropriate receptacle.

SAFE ZONE

Make sure to decontaminate your PPE further according to OSHA 29CFR 1910.132 Personal Protective Equipment, NFPA recommendation 1851- Standard on Selection Care, and Maintenance for Structural Fire Fighting and Proximity Fire Fighting, and your PPE manufacturer recommendations.

***If staffing permits, utilize available personnel to assist with the doffing procedure. All persons engaged should utilize an enhanced level of eye, skin and respiratory protection.**